

# BA-ACD-2064

## SPECIALTY DOORS

### Recessed Acoustical Access Door for Drywall

Highest STC & OITC Rating in the INDUSTRY

#### Application

This recessed access door is ideal for use on Acoustical drywall walls where maintaining STC (Sound Transmission Class) and OITC (Outdoor-Indoor Transmission Class) is required. The unique taping bead flange allows for a concealed finish.

#### Product Features

- Zinc coated steel provides superior corrosion resistance
- Drywall taping bead flange
- Recessed door fitted with 5/8" thick drywall, ensures finish similar to surrounding
- Tested and evaluated to ASTM: E90(09), ASTM: E413(16), ASTM: E1332(16) and certified to STC Rating 64 and OITC Rating 53

#### Specifications:

**Material:** 18 Gauge Satin Coat Steel

**Door:** 18 Gauge recessed design filled with 1½" thick acoustic mineral liner, 0.11" thick mineral filled vinyl barrier and fitted with 5/8" thick drywall as finished face

**Frame:** 18 Gauge, press bent for strength and rigidity, drywall taping bead flange  
Insulated with 1" thick acoustical mineral liner

**Gasket:** Silicone perimeter seal gasket


**Hinge:** Continuous exposed stainless steel piano hinge

**Standard Lock:** Screw driver operated Compression Latch

**Optional Lock:** Compression Latch with Hex Head, Hex with security pin, Square, Triangle

**Acoustic Rating:** This door has been tested and evaluated to ASTM: E90(09), ASTM: E413(16), ASTM: E1332(16) and certified to STC Rating 64 and OITC Rating 53.

**Finish:** Satin Coat Steel

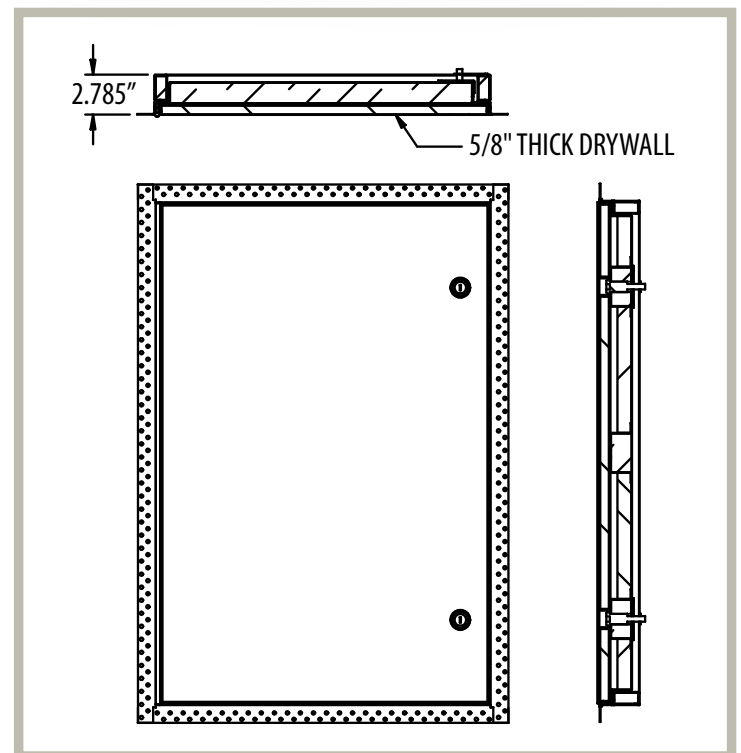

#### STANDARD SIZES

Nominal Door Size W&H			Weight per Door	
Inches	mm	Latches	lbs.	kg.
12 x 12	300 x 300	1	13.2	6
18 x 18	450 x 450	1	24.3	11
24 x 24	610 x 610	1	41.9	19
24 x 36	610 x 914	2	62.0	28




228 Park Ave S # 76520  
 New York NY 10003-1502  
 United States  
 www.BestAccessDoors.com  
 sales@bestaccessdoors.com  
 Tel.: 1-800-483-0823  
 Fax: 1-888-828-6021

# BA-ACD-2064



## STEEL DRYWALL ACOUSTICAL ACCESS DOOR

QTY.	NOMINAL SIZE	A	B	C	D	E	F	LOCK
	12 X 12 (305 X 305)	11.57 (294)	11.82 (300)	14.48 (368)	14.48 (368)	12.04 (306)	12.04 (306)	1
	18 X 18 (457 X 457)	17.57 (446)	17.82 (453)	20.48 (520)	20.48 (520)	18.04 (458)	18.04 (458)	1
	24 X 24 (610 X 610)	23.57 (599)	23.82 (605)	26.48 (673)	26.48 (673)	24.04 (611)	24.04 (611)	1
	24 X 36 (610 X 914)	23.57 (599)	35.82 (910)	26.48 (673)	38.48 (977)	24.04 (611)	36.04 (915)	2

ACOUSTIC RATING:  
 THIS DOOR HAS BEEN TESTED AND EVALUATED TO ASTM: E90(09),  
 ASTM: E413(16), ASTM:E1332(16) AND CERTIFIED TO STC RATING 64  
 AND OITC RATING 53

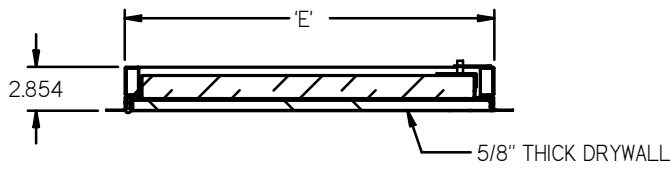

MATERIAL:  
 18GA (.052") SATIN COAT STEEL

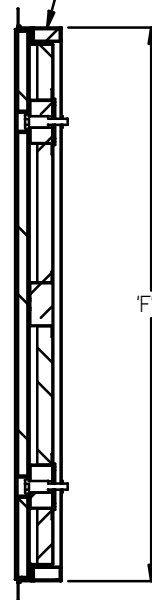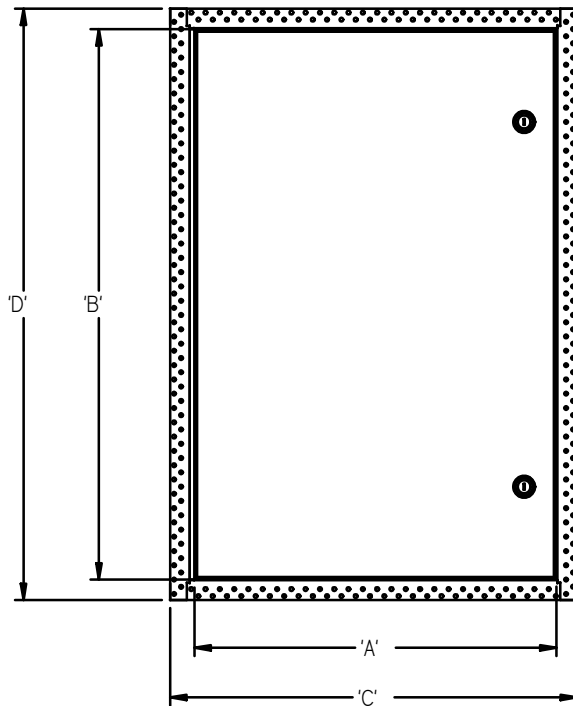

STANDARD FEATURES: SLOTTED COMPRESSION LATCH  
 LOCK OPTIONS:

- HEX
- HEX WITH SECURITY PIN
- SQUARE
- TRIANGLE

JOB NAME:

APPROVED BY:

CUSTOMER:

DATE: