




GFRG/GFRC ACCESS PANEL FOR CEILINGS


POP-OUT RADIUS CORNER

INSTALLATION SPECIFICATION

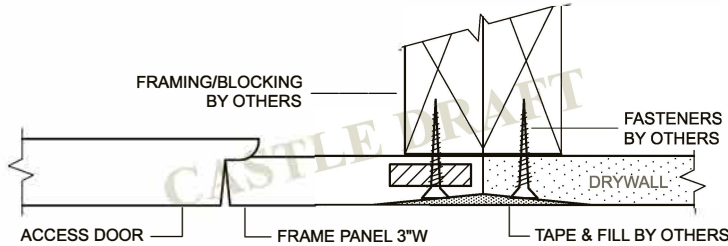

DIMENSION AND APPEARANCE

STOCK #	ACCESS DOOR OPENING SIZE	ROUGH OPENING SIZE
RC-580008	8" x 8"	14" x 14"
RC-580009	9" x 9"	15" x 15"
RC-580012	12" x 12"	18" x 18"
RC-580016	16" x 16"	22" x 22"
RC-580018	18" x 18"	24" x 24"
RC-580020	20" x 20"	26" x 26"
RC-580024	24" x 24"	30" x 30"
RC-580030	30" x 30"	36" x 36"
RC-580036	36" x 36"	42" x 42"
RC-580042	42" x 42"	48" x 48"
RC-580048	48" x 48"	54" x 54"
RC-581216	12" x 16"	18" x 22"
RC-581218	12" x 18"	18" x 24"
RC-581224	12" x 24"	18" x 30"
RC-581236	12" x 36"	18" x 42"
RC-581836	18" x 36"	24" x 42"

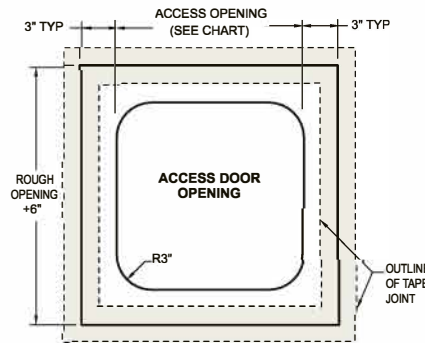

* NEOPRENE GASKET AVAILABLE UPON REQUEST

TECHNICAL DATA

Shell Thickness	1/8" to 3/16"
Fastener Test Pull Out (wood stud)	525 lb avg.
Fastener Test Pull Out (metal stud)	215 lb avg.
Fastener Push Through Test	350 lb avg.
Fuel Contribution (ASTM E84-80)	0
Flame Spread (ASTM E84-80)	0
Smoke Index (ASTM E84-80)	0
Combustion (ASTM E84-80)	Non-combustible
Class A non-rated	—
CSI Code	CSI #08310

PRODUCT FEATURES

CREATING SEAMLESS SOLUTIONS


Seamless™ Access Panels by BestAccessDoors are manufactured direct, manufactured from GFRG/GFRC & 70% post-consumer recycled glass, for a unique GREEN design-matrix designed to blend seamlessly into your walls and ceilings. They consist of a surround frame and either a drop-in door or hinged door. Available in Sixty standard residential or commercial sizes, BestAccessDoors are perfect for jobs where access is required at regular intervals. Lightweight and easily textured, the panels can be used in both new and retrofit construction across unlimited applications. Their smart design to help contractors work smarter, faster and better, the Seamless™ panels feature a tapered edge for tape joints and won't shrink, crack or sag. Seamless™ Access Panels provide an aesthetically pleasing solution for a more attractive interior.

PRODUCT FEATURES

- Tapered edge for tape joint
- Easily textured
- Lightweight
- Single trade installation
- No shrinking, cracking, sagging or rusting
- Blends seamlessly into surrounding drywall
- Concealed hinge
- Reduce labor costs
- Moisture resistant
- Zero mold & fungus growth

LEED RATING SYSTEM

MSDS



CONTAINS 70% POST-CONSUMER LIGHTWEIGHT RECYCLED GLASS

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:	SPECIAL INSTRUCTIONS:			
LOCATION:				
DATE:	SUBMITTAL APPROVAL: (signature or stamp)			
TAGGING INSTRUCTIONS:				

ADDRESS: 427 N Tatnail St, #76520 Wilmington, DE 19802-2230

Tel.: 1-800-483-0823

fax: 1-888-828-6021

www.bestaccessdoors.com

sales@bestaccessdoors.com

CUSTOM SIZES AVAILABLE

SEAMLESS™ Access Panel