



Quality Access Doors - FAST!

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

The BA-FRD-UP model provides secure and fire-rated access to ceiling spaces, featuring a 2-hour fire rating for enhanced safety. Its upward-opening design, hinged on the short side, allows for easy access while maintaining a flush, professional look.

FEATURES

- **2-Hour Fire-Rated Protection:** Designed for ceilings, providing certified fire resistance.
- **Durable & Corrosion-Resistant:** Made from galvanized steel, offering superior strength and longevity.
- **Upward Opening Design:** Hinged on the short side for improved accessibility in ceiling installations.
- **Secure Closure:** Features a raised knurled knob center latch for easy operation and a reliable locking mechanism.
- **Insulated for Safety:** Built-in insulation enhances fire resistance and thermal protection.

SPECIFICATIONS

MATERIAL: Satin Finish Galvanized (Galvanized) Steel.

FINISH: 1.31mm [18 GA.], Self Closing c/w Inside Lifting Handle.

LINER: 0.85mm [22ga.].

FRAME: 1.61mm [16 ga.].

FLANGE: 22mm [¾"] Exterior Flange. 38mm [1½"] Overall Width.

PANEL CLOSER: The Design of the Unit Allows the Door Panel to be Self-Closing By Gravity.

LATCH: ¼" ALLEN KEY, WITH INTERIOR RELEASE.

INSULATION: 38mm [1½"] High Temperature

FINISH: Rust Inhibitive Prime Coat (Off-white).

For a complete list of options visit www.BestAccessDoors.com




SKU: **BA-FRD-UP**

2-HOUR FIRE-RATED UPWARD OPENING ACCESS PANEL

FOR CEILINGS

DIMENSIONS AND APPEARANCE

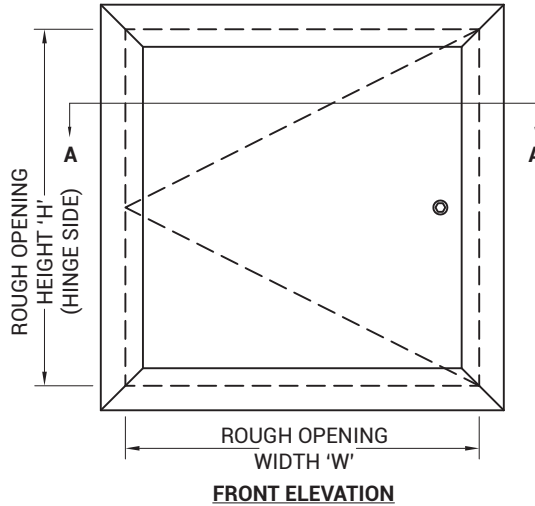

INSTALLATION:

THE FRAME IS MANUFACTURED WITH MOUNTING HOLES. SEE INSTALLATION INSTRUCTIONS SUPPLIED WITH PANEL .

ORDERING:

PLEASE ORDER BY ROUGH OPENING SIZE. WHEN ORDERING THE SECOND DIMENSION GIVEN IS THE HINGE SIDE. THE 610MM [24"] DIMENSION IS THE HINGE SIDE.



Model BA-FRD Attic-Ceiling Fire-rated Panel is manufactured under the factory inspection service of Intertek (Warnock Hersey) and has a label reading: "Listed access frame and insulated fire door assembly (insulated) 2 hours combustible construction, 4 hours non-combustible construction. Horizontal Installation only."

OPTIONS: * - DENOTES ADDITIONAL COST.

MATERIAL:

- STANDARD MATERIAL - GALVANNEALED STEEL.

- OPTIONAL MATERIAL - 304 STAINLESS STEEL WITH A NO. 4 POLISHED FINISH ON THE EXTERIOR SURFACE.

HARDWARE:

- STANDARD MATERIAL - ¼ ALLEN KEY.

- OPTIONAL HARDWARE

For detailed specifications see submittal sheet

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003




WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-FRD-UP

2-HOUR FIRE-RATED UPWARD OPENING ACCESS PANEL FOR CEILINGS

ROUGH OPENING SIZE W x H		NO. OF LATCHES/LOCKS	WIGHT IN KGS.	WIGHT IN LBS.
METRIC (mm)	INCHES			
305 x 305	12 x 12	1	5.21	11.50
356 x 356	14 x 14	1	6.57	14.50
406 x 406	16 x 16	1	7.71	17.00
457 x 457	18 x 18	1	9.52	21.00
457 x 610	18 x 24	1	12.02	26.50
457 x 762	18 x 30	1	14.06	31.00
457 x 914	18 x 36	1	16.89	37.25
457 x 1219	18 x 48	1	22.22	49.00
508 x 508	20 x 20	1	11.11	24.50
508 x 610	20 x 24	1	12.47	27.50
508 x 762	20 x 30	1	15.87	35.00
508 x 914	20 x 36	1	18.82	41.50
559 x 559	22 x 22	1	12.15	29.00
559 x 762	22 x 30	1	17.23	38.00
559 x 914	22 x 36	1	19.95	44.00
610 x 610	24 x 24	1	14.51	32.00
610 x 762	24 x 30	1	17.46	38.50
610 x 914	24 x 36	1	20.97	46.25
610 x 1219	24 x 48	1	27.66	61.00
762 x 762	30 x 30	1	21.31	47.00
762 x 914	30 x 36	1	24.94	55.00
762 x 1219	30 x 48	1	31.97	70.50
813 x 813	32 x 32	1	24.04	53.00
914 x 914	36 x 36	1	29.48	65.00

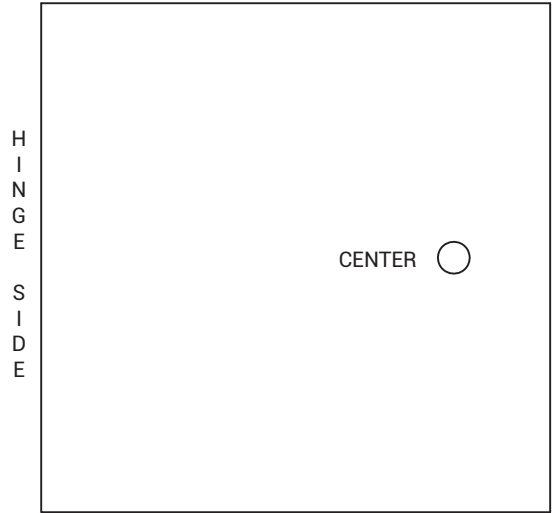


CENTER LATCH:

- ALLEN KEY
- RAISED KNURLED KNOB
- NON-LOCKING HANDLE
- 1 1/8" MORTISE PREP ONLY
- 1 1/8" MORTISE PREP COMPLETE WITH MORTISE CYLINDER

SECOND DIMENSION IS HINGE SIDE

NET OPENING = WIDTH MINUS 83mm [3 1/4"]
HEIGHT MINUS 39mm [1 1/2"]

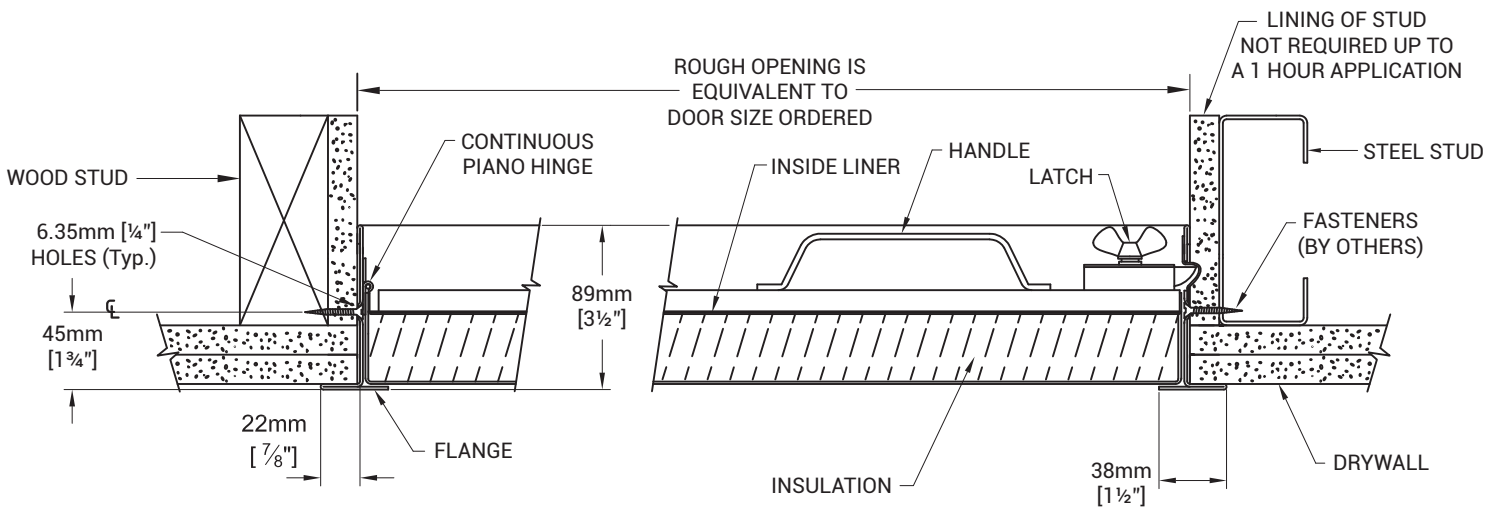

SECTION A-A