



Quality Access Doors - FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## DESCRIPTION

Not keen on the seam line showing up in your design? Then the Envisivent Permanent Air Return Vent is the perfect solution for your style. Meant to replace a standard vent cover for a 14" x 6" or 12" x 6" duct opening (if applicable) or wall cavity, and fits into a drywall opening of 16" x 10". A completely seamless look with no outer lines, creating a contemporary aesthetic that's perfect for any home, office or commercial space.

## APPLICATION

- Designed to be installed with 1/2" thick drywall
- Install anywhere on a wall where there are duct openings (if applicable) both high (towards the ceiling) or low (towards the floor)
- Permanent installation - once installed the air return vent cannot be removed

## FEATURES

- 18 straight horizontal slots
- Over 33 square inches (215 square cm) of open vent area
- Moisture, mold, and water resistant
- Machine-beveled outer edges for seamless finishing
- Primed and ready to paint
- Eco-friendly manufacturing and non-hazardous
- Vent Cover Material: Triple Fibre Reinforced Cement Board
- Designed to be installed with 1/2" or 5/8" thick drywall


## SPECIFICATIONS

- Mud-in/ Tapeable Air Return Vent for duct opening (if applicable) size 14" x 6"
- Overall Dimensions: 16" x 10" x 0.5"
- Vented Opening Dimensions: 12" x 6"
- Fits into a Drywall Opening of 16.25" x 10.25"
- Each slot size - 5.805" x 0.32"
- 18 straight horizontal vent slots
- Over 33 square inches of open vent area

For a complete list of options visit [www.BestAccessDoors.com](http://www.BestAccessDoors.com)



SKU: **BA-IG-CA14X6**

## PERMANENT MUD-IN FLUSH MOUNT WALL AIR RETURN

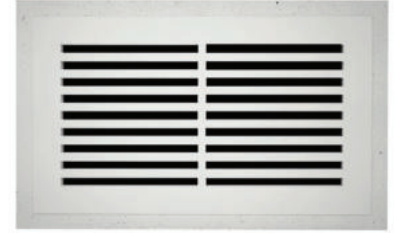

## DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

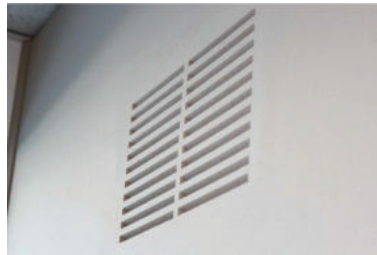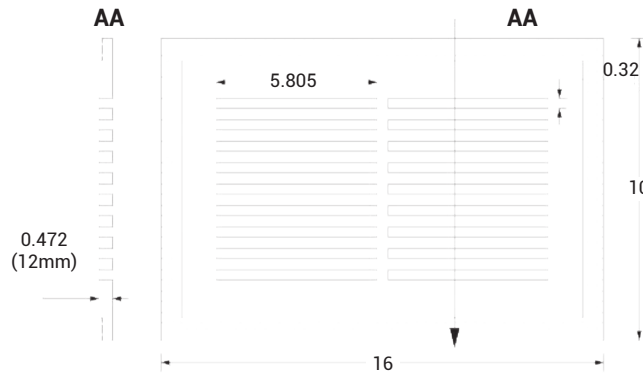

### Material Information:

Raw Material: Cement, fibres, quartz sand, nonhazardous fillers  
 Density: 1.0<D ≤1.2 g/cm<sup>3</sup>  
 Asbestos Content: 100% asbestos-free  
 Fire resistance: non-combustible  
 Water Absorption: ≤40%  
 Resistant Bending Strength: ≤10.5 MPa dry  
 Moisture Movement - 0.25 %  
 Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

## PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)