



Quality Access Doors - FAST!

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTION

A premium flush mount supply vent cover for a 3"x10" duct. Complete with diffuser flaps to control your air flow, this cover fits into the drywall opening of 4"x11" and has a vented/slotted area of 2"x9".

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Rectangular straight vent slots.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

SPECIFICATIONS


- Over 6.76 square inches (43.61 square centimeters) of open area.
- Slot Size: 0.26" x 2" (6.6mm x 50.8mm).
- 13 rectangular straight vertical slots.
- Overall dimensions are 13.5" x 6.5" x 0.5" (343mm x 165.1mm x 12mm).
- Product weight is 1.21 pounds (0.55 kilograms)

For a complete list of options visit www.BestAccessDoors.com

SKU: **BA-IG-MAG-S3X10**

WALL AND CEILING SUPPLY VENT

REMOVABLE AND MAGNETIC

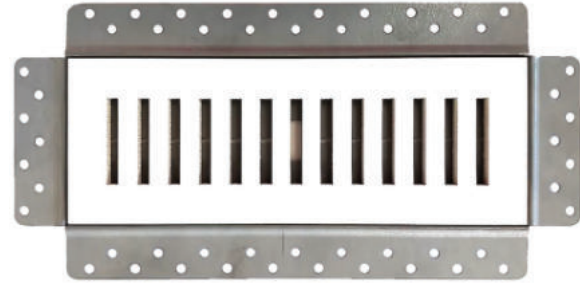


DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

MATERIAL INFORMATION:

Raw Material: Cement, fibres, quartz sand, nonhazardous fillers
Density: 1.0 $D \le 1.2 \text{ g/cm}^3$
Asbestos Content: 100% asbestos-free
Fire resistance: non-combustible
Water Absorption: $\le 40\%$
Resistant Bending Strength: $\le 10.5 \text{ MPa dry}$
Moisture Movement: 0.25 %
Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing.

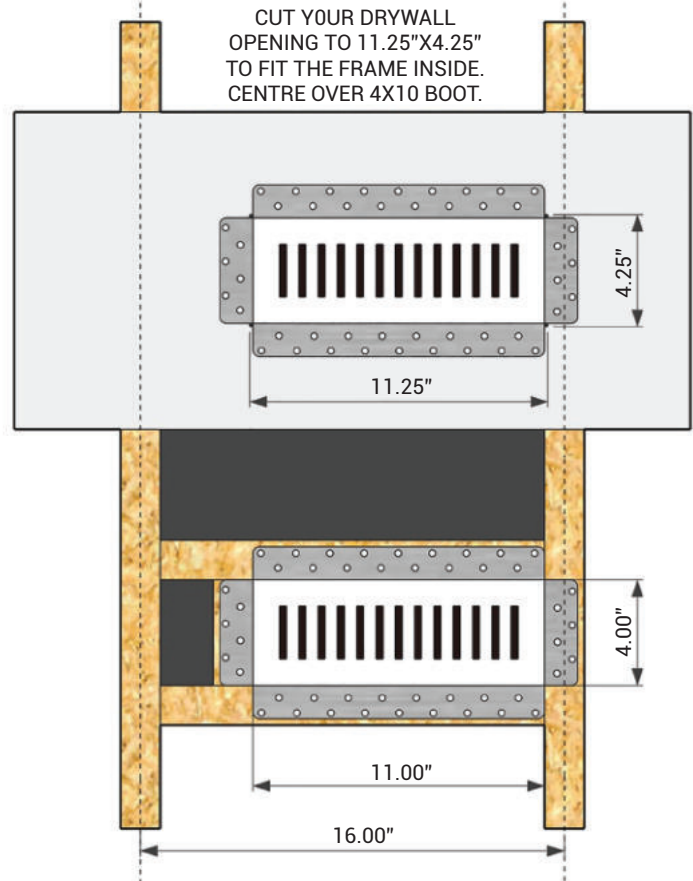

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com



SUBMITTAL

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

228 PARK AVE. S. #76520
NEW YORK, NY, 10003

WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-IG-MAG-S3X10 REMOVABLE AND MAGNETIC WALL AND CEILING SUPPLY VENT

AIRFLOW DATA

			Core Velocity (FPM)	300	400	500	600	700	800	1000	1200	1400
Opening Width (in.)	Opening Height (in.)	Core Area (ft ²)	Core Velocity Pressure ("wc)	0.006	0.010	0.016	0.022	0.030	0.040	0.062	0.090	0.122
9	2	0.125	Flow (CFM)	33	45	56	67	78	89	111	134	156
			Static Pressure ("wc)	0.025	0.045	0.070	0.100	0.136	0.178	0.279	0.401	0.546
			Throw (ft) (150 100 50)	3 5 12	4 7 16	5 9 20	6 10 24	7 12 28	8 14 33	17 41	13 21 49	15 24 57

