

DESCRIPTION

A premium flush mount access panel cover for a 10"x10" drywall opening. This cover can also be used on a wall or ceiling and yields a 8.125"x8.125" accessible area.

APPLICATION

- Designed for 1/2" and 5/8" thick drywall. - Suitable for both wall and ceiling installation.

Screws on to the face of your drywall. - Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.

- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board cover.

- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.

- 4 rare earth magnets (0.250"diametre x 0.060" thick)

- Easy installation, primed and ready to paint.

. - Fire Rated, non-flammable.

- Impact Resistant.

- Moisture and Water Resistant, Mold

Resistant.

Eco- Friendly Manufacturing and Non-Hazardous.

SPECIFICATIONS

- Over 66 square inches (425.8 square

centimeters) of accessible area.

- Overall dimensions are 12.125" x 12.125"
- x 0.5" (307.9mm x 307.9mm x 12mm). Product weight is 1.98 pounds (0.89

kilograms)

For a complete list of options visit www.BestAccessDoors.com




To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET

SKU: BA-IG10 **REMOVABLE FLUSH CCESS PANEL COVER** MAGNETIC

DIMENSIONS AND APPEARANCE

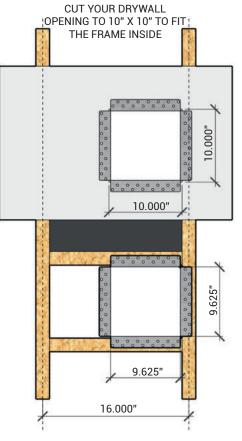


PROJECT DATA

1-800-483-0823

1-888-828-6021

FAX:

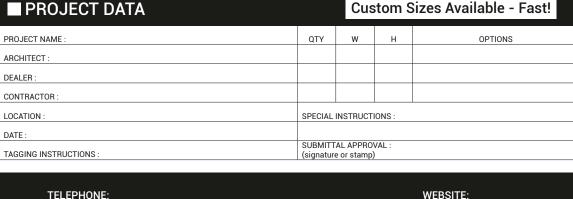






WEBSITE: www.BestAccessDoors.com





9.625

12 125

Material Information:

0.487 |-

Raw Material: Cement, fibres, quartz sand, non-hazardous fillers. **Density:** 1.0<D ≤ 1.2 g/cm3 Asbestos Content: 100% asbestos-free Fire resistance: Non-combustible edge and adjustable diffuser. Water Absorption: ≤40% Resistant Bending Strength: ≤10.5 MPa dry Moisture Movement: 0.25 % Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .

