

DESCRIPTION

A premium flush mount access panel cover for a 20"x20" drywall opening. This cover can also be used on a wall or ceiling and yields a 18.375"x18..375" accessible area.

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board cover.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.375"diametre x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 Degree angled slots for directional venting and to hide a fan.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.

SPECIFICATIONS

- Over 337.64 square inches (2178.31 square centimeters) of accessible area.
- Overall dimensions are 22.375" x 22.375" x 0.5" (568.3mm x 568.3mm x 12mm).
- Product weight is 3.6 pounds (1.64 kilograms)

For a complete list of options visit www.BestAccessDoors.com

Scan or () Click

SKU: **BA-IG20**ACCESS PANEL COVER


REMOVABLE & MAGNETIC


SUBMITTAL/TECHNICAL DATA SHEET



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

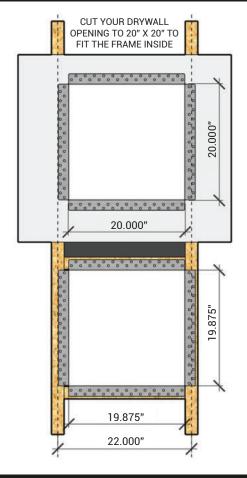



Material Information:

Raw Material: Cement, fibres, quartz sand, non- hazardous fillers.

Density: 1.0<D ≤ 1.2 g/cm3

Asbestos Content: 100% asbestos-free Fire resistance: Non-combustible edge and adjustable diffuser.

Water Absorption: ≤40%

Resistant Bending Strength: ≤10.5 MPa dry

Moisture Movement: 0.25 %

Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	Н	OPTIONS	
ARCHITECT:					
DEALER:					
CONTRACTOR:					
LOCATION:	SPECIAL	SPECIAL INSTRUCTIONS:			
DATE:					
TAGGING INSTRUCTIONS:		SUBMITTAL APPROVAL : (signature or stamp)			



To view Pricing and Additional Product Info.



TELEPHONE: 1-800-483-0823 FAX: 1-888-828-6021



228 PARK AVE. S. #76520 NEW YORK, NY, 10003



WEBSITE: www.BestAccessDoors.com