



Quality Access Doors - FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## DESCRIPTION

A premium flush mount access panel cover for a 6"x6" drywall opening. This cover can also be used on a wall or ceiling and yields a 4.125"x4.125" accessible area.

## APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

## FEATURES

- Magnetic removable triple fibre reinforced cement board cover.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diametre x 0.060" thick).
- Easy installation, primed and ready to paint.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

## SPECIFICATIONS

- Over 17.01 square inches (109.7 square centimeters) of open area.
- Overall dimensions are 8.125" x 8.125" x 0.5" (206.37mm x 206.37mm x 12mm).
- Product weight is 1.43 pounds (0.65 kilograms)

SKU: **BA-IG6**



**ACCESS PANEL COVER**

REMOVABLE & MAGNETIC



## DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

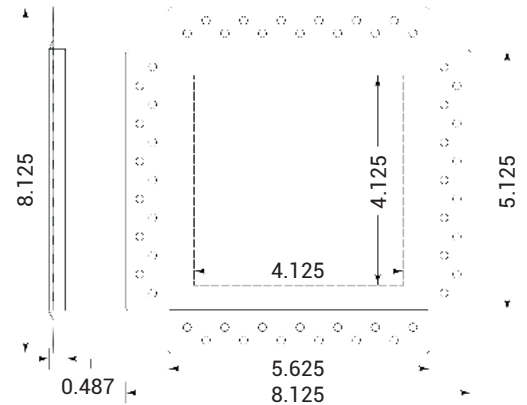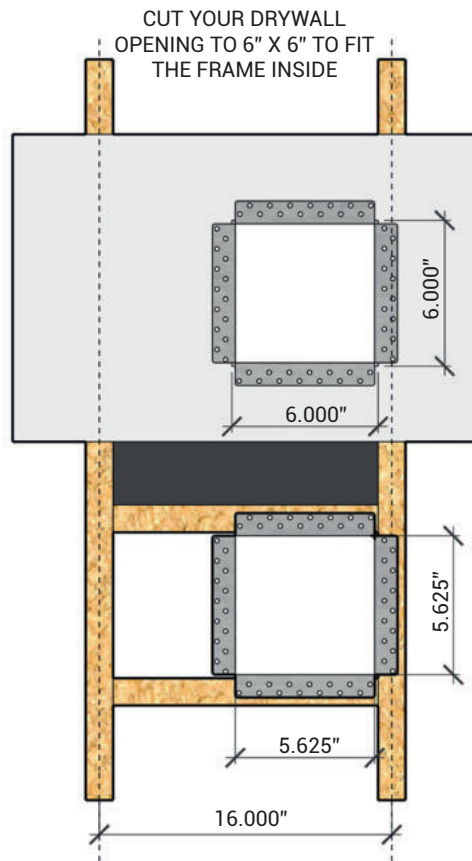

### Material Information:

- Raw Material:** Cement, fibres, quartz sand, non-hazardous fillers.
- Density:**  $1.0 < D \leq 1.2 \text{ g/cm}^3$
- Asbestos Content:** 100% asbestos-free
- Fire resistance:** Non-combustible edge and adjustable diffuser.
- Water Absorption:**  $\leq 40\%$
- Resistant Bending Strength:**  $\leq 10.5 \text{ MPa dry}$
- Moisture Movement:** 0.25 %
- Freeze Thaw:** No distortion after 25 repeated cycles of freezing and thawing .

For a complete list of options visit [www.BestAccessDoors.com](http://www.BestAccessDoors.com)

## PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)