

___ Model XPEA

Frame: 16 ga. Galvanneal Steel Frame with Flange Recessed 3/4"; 2-3/4" wide Galvanized expanded metal lath.

Door: 2" Thick insulated .040 Aluminum door with continuous stainless steel hinge. R value 5.7.

Gasket: Adhesive backed EPDM foam and silicone rubber seals on frame and door.

Finish: White powder coat paint.

Handle: (H2) Non-Locking, Zinc die cast with chrome plating

___ Model XPES (Stainless Steel)

Frame: 16 ga. Stainless Steel Frame with Flange Recessed 3/4"; 2-3/4" wide Galvanized Expanded Metal Lath.

Door: 2" Thick Insulated 20 ga. Stainless steel with continuous stainless steel hinge.

Finish: 304 Stainless - No. 4 Finish

Gasket: Adhesive backed EPDM foam and silicone rubber seals on frame and door.

Handles: (H2) Non-Locking, Zinc die cast with chrome plating

ORDER SIZE IS FRAME ID

Minimum Size: 8" x 8", maximum size 48" x 48"


OPTIONAL FEATURES AT ADDITIONAL COST:

_____ (H3) Locking Zinc die cast handle with chrome plating

_____ (H4) Removable flush locking handle


_____ Optional color code- see colors below

B-Bronze	R-Red	BK- Flat Black	S-Sand	AMS- AMS Beige	SB- Flat Beige	G- Gray	SI- Silver
----------	-------	----------------	--------	----------------	----------------	---------	------------

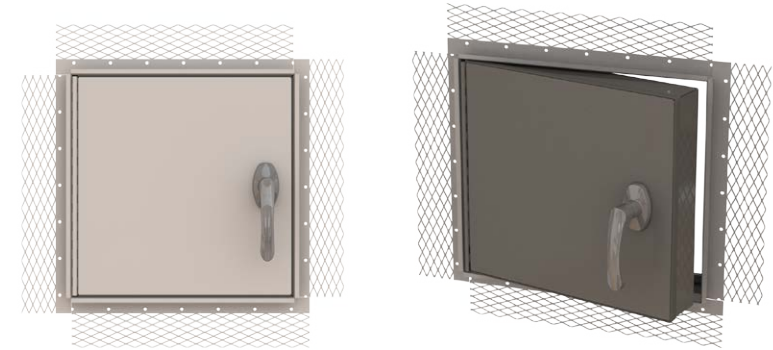

BA-XPEA

BA-XPES

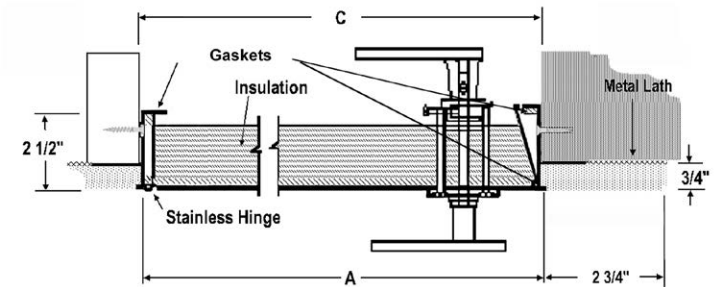


QTY	Size (A)	Wall Opening (C)	Handles	Approx Ship Weight in lbs.	QTY	Size (A)	Wall Opening (C)	Handles	Approx Ship Weight in lbs.
	12" x 12"	12-3/8" x 12-3/8"	1	11		24" x 30"	24-3/8" x 30-3/8"	2	40
	14" x 14"	14-3/8" x 14-3/8"	1	15		24" x 36"	24-3/8" x 36-3/8"	2	42
	18" x 18"	18-3/8" x 18-3/8"	1	19		24" x 48"	24-3/8" x 48-3/8"	2	57
	20" x 24"	20-3/8" x 24-3/8"	1	30		30" x 30"	30-3/8" x 30-3/8"	2	44
	20" x 30"	20-3/8" x 30-3/8"	2	32		30" x 36"	30-3/8" x 36-3/8"	2	56
	22" x 30"	22-3/8" x 30-3/8"	2	34		36" x 36"	36-3/8" x 36-3/8"	2	61
	22" x 36"	22-3/8" x 36-3/8"	2	40		36" x 48"	36-3/8" x 48-3/8"	2	75
	24" x 24"	24-3/8" x 24-3/8"	1	27		48" x 48"	48-3/8" x 48-3/8"	2	108



228 Park Ave S # 76520, New York NY 10003-1502, United States
 www.BestAccessDoors.com | sales@bestaccessdoors.com
 Tel.: 1-800-483-0823 | Fax: 1-888-828-6021

DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING

Distributor:	Quantity:
Contractor:	Approved By:
Model #:	Architect:
Project:	Date:

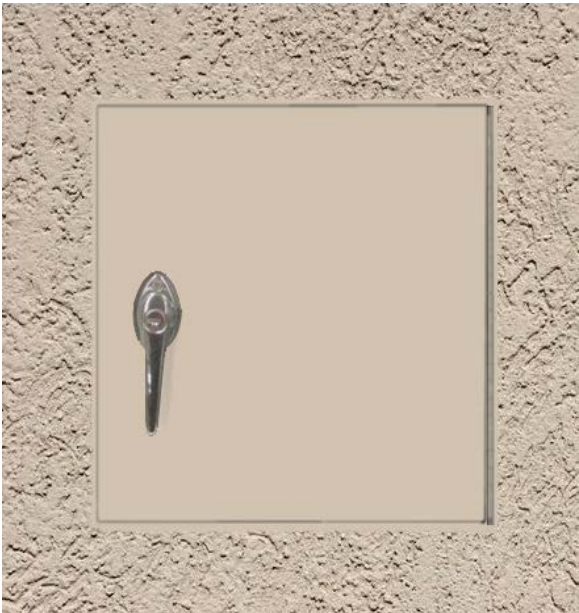

Example of XPEA Installed in Stucco Wall



(H4) Removable Flush Locking Handle



H3 Locking Handle



Inside Latch for (H4) Removable Flush Locking Handle